

PART#76-1061



TOOLS NEEDED

15mm SOCKET
18mm SOCKET
3/4" SOCKET
3/4" COMBINATION WRENCH
TORQUE WRENCH
RATCHET

QTY	DESCRIPTION
2	STAINLESS STEP BARS (1 DRIVER SIDE ; 1 PASSENGER SIDE)
4	STAINLESS MOUNTING BRACKETS
4	STAINLESS 1/2-13 UNC*2" L HEX HEAD BOLTS
4	STAINLESS M12-P1.75 *120mm L HEX HEAD BOLTS
8	STAINLESS 1/2" LOCK WASHERS
8	STAINLESS 1/2" FLAT WASHERS

STEPS	INSTALLATION
1	CHECK CONTENTS OF BOX FOR DAMAGE OR MISSING ITEMS
2	BOLT MOUNTING BRACKET TO STEP BARS WITH 1/2" HEX BOLTS
3	REMOVE BODY MOUNT BOLTS ; MOUNT BRACKET TO BODY MOUNT WITH STAINLESS BOLT PROVIDED
4	CHECK THAT THE STEP BAR IS ALLIGNED WITH VEHICLE
5	TIGHTEN AND TORQUE ALL MOUNTING BRACKET BOLTS TO 55 FT LBS.

DRIVER SIDE

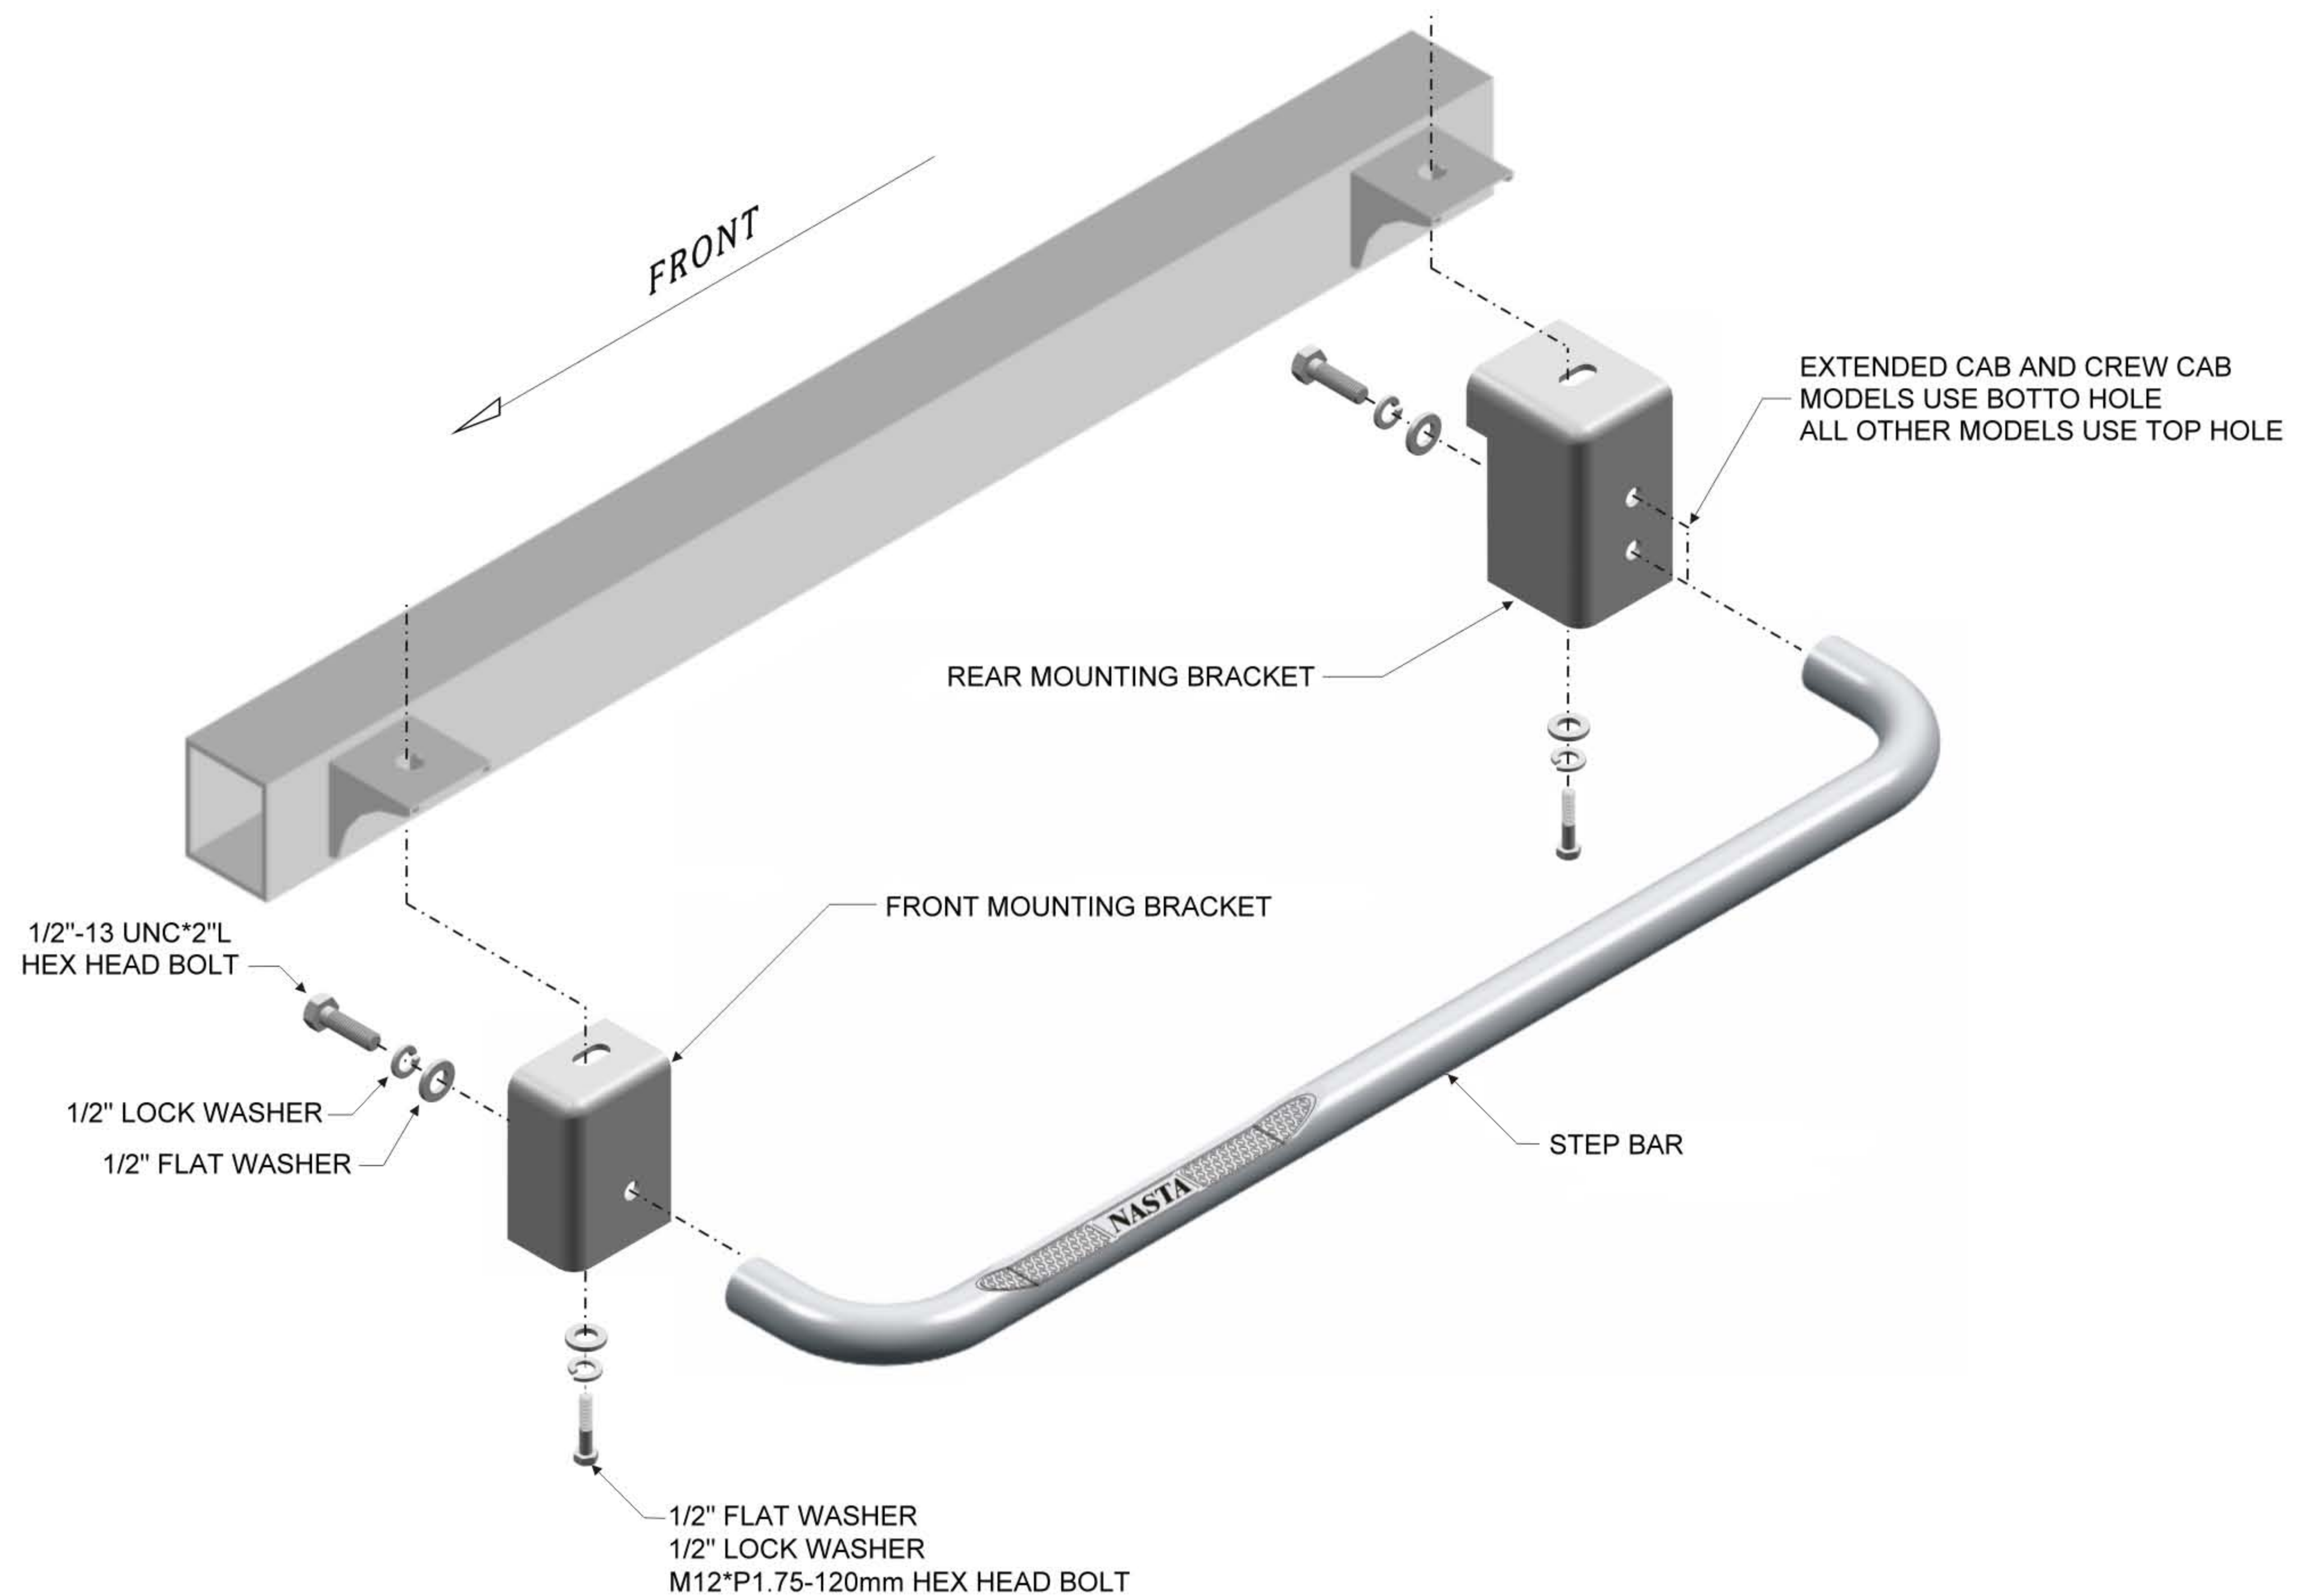


FIGURE 1

ASSEMBLY AND INSTALLATION VIEW OF DRIVER SIDE- PASSENGER SIDE OPPOSITE

NASTA[®]

NASTA INTERNATIONAL, INC.
Div. of **TA CHEN** INT'L CORP.
5 Boswell Bristol, TN 37620 U.S.A
TEL:(423)764-0700.FAX(423)764-7849.Toll Free(877)891-0816
www.nastainternational.com